

LEDSDXR627 Steel Housing LED Emergency Unit



| | |
|-------------------|--|
| Project: | |
| Type: | |
| Catalog #: | |

STANDARD



ILLUMINATION

- Long lasting, efficient, ultra bright white LED lamp heads.
- 1.5 watt (12 LEDs x 0.125 watt) per head.
- High performance chrome-plated metallized reflector and plastic lens for optimal light distribution.
- Adjustable LED lamp heads provide optimal center-to-center spacing.

ELECTRICAL

- Dual 120V/277V.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V sealed lead acid, maintenance-free, rechargeable battery.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capacity of 20W standard.
- Runs up to 8 hours without remote heads.

MOUNTING

- Knockouts on the back for wall mount.
- Side and top knockouts for conduit feed applications.


HOUSING

- Durable 20-gauge steel construction.
- White or black finish.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery pro rated for two years.
- UL Listed for damp locations (20°C – 50°C) standard.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

DIMENSIONS

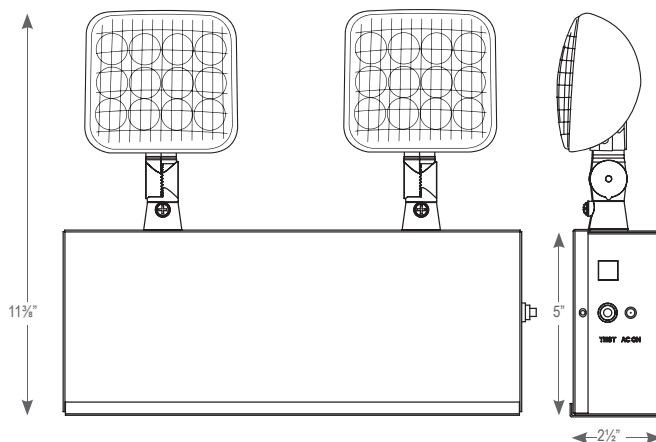

ORDERING INFORMATION

Sample Part Number: LEDSDXR627

| MODEL | HOUSING COLOR | |
|------------|---------------|----------------|
| LEDSDXR627 | Blank B | White Black |

LEDSDXR627 Steel Housing LED Emergency Unit



| | |
|-------------------|--|
| Project: | |
| Type: | |
| Catalog #: | |

ELECTRICAL INFORMATION

| CATALOG NUMBER | INPUT WATTS (W) | | INPUT AMPS (A) | |
|----------------|-----------------|------|----------------|-------|
| | 120V | 277V | 120V | 277V |
| LEDSDXR627 | 11.0 | 11.0 | 0.11A | 0.04A |

REMOTE LAMP COMPATIBILITY

| MODEL NUMBER | BATTERY | REMOTE CAPACITY | COMPATIBLE REMOTE HEAD FAMILY | | | | | | | | | | | |
|--------------|---------|-----------------|-------------------------------|-------|---------|------|-----|----|-----|-----|-----|-----|-----|--------|
| | | | MRHLED | RHLED | RH16LED | RH16 | | RH | | RHR | | SRH | | SRHLED |
| | | | | MV | | 6V | 12V | 6V | 12V | 6V | 12V | 6V | 12V | |
| LEDSDXR627 | 6V | 20W | | X | X | X | | X | | X | | X | | X |