

Project:	
Type:	
Catalog #:	

## STANDARD



## FEATURES

- Available in 2700k, 3000k, 4000k, and 5000k color temperatures.\*
- Long-life LEDs provide at least 70% of initial lumen output ( $L_{70}$ ) for 66,000 hours of operation.\*\*
- Color rendering index ( $R_a$ ) > 80.
- BRK-56-BW-9L provides 860 nominal lumens from 8 nominal watts.
- BRK-56-BW-15L provides 1,490 nominal lumens from 14 nominal watts.
- Input voltage = 120V 50-60Hz.
- Power factor > 0.90.
- Total harmonic distortion < 20%.
- Triac dimming.
- Aluminum housing, painted white. Polycarbonate lens.
- Easy installation in new construction or remodel applications. Equipped with torsion springs.
- E26 medium screw-base (Edison) connector comes standard.
- Compatible with BL9ICLED series housings.
- This device is not intended for use with emergency exits.

## WARRANTY & LISTINGS

- cULus listed for wet locations.
- Energy Star qualified.
- Complies with FCC Part 15, class B.
- Complies with EN61000-4-5, input transient protection (1.0kV).
- 5-year warranty of all electronics and housing.

\* Contact factory for other color temperatures and lumen packages.


\*\*  $L_{70}$  hours are IES TM-21-11 calculated hours.



## COMPATIBLE DIMMERS

Manufacturer/Series	Model Number
Lutron/Maestro C-L	MACL-153MR
Lutron/Diva	DV-600P
Lutron	PD-6WCL
Leviton/Sureslide	6674
Leviton/Sureslide	6633-P
Leviton/Sureslide	6631
Legrand/Harmony	HCL453PTCCCV6

## DIMENSIONS

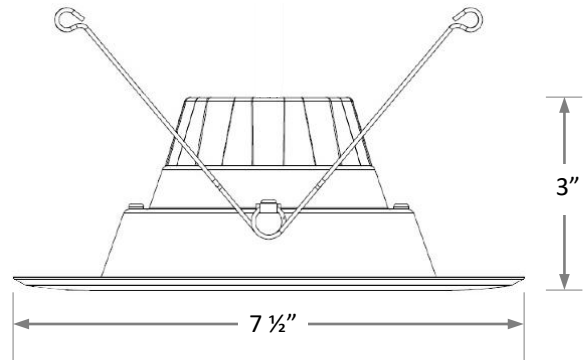

## ORDERING INFORMATION

Example: BRK-56-BW-15L-4K

Series	Trim Type		Nominal Lumen Output		Color Temperature	
			9L	900 lumens	27K	2700k
BRK-56	BW	Baffle	4K	4000k	3K	3000k
			5K	5000k	4K	4000k
	15L		3K	3000k	4K	4000k
			4K	4000k		